

OPERATING & SAFETY GUIDE

This appliance is only for professional use by a qualified operator



Butane Table Top Stove
Product Code 602011

A Full EHA Code of Practice for the "Safe Use of LPG" is available on our website www.allenshire.co.uk
Please go to our Gas Appliances and BBQs catalogue page to download

Care of the Butane Table Top Stove

- The stove is supplied with one A4 butane canister that will last around 90 min at full power and produce 2kw of heat. It may be hazardous to attempt to fit or use any other types of gas cartridge.
- The stove has a "flame failure device" built in designed to stop gas escaping when the burner is not lit or has blown out.
- It is essential that the appliance is used in a sheltered area that is very well ventilated.
- Place at least 20 cm away from walls and 100 cm below ceilings.

Safety Precautions

1. Check that seals between the appliance and gas canister are in place and in good condition before engaging gas cartridge.
2. Check alignment of gas cartridge collar notch with locating safety tab.
3. Change gas canister in a well ventilated area—preferably outside, away from any source of ignition.
4. Do not use the appliance if the seals are damaged or worn.
5. Do not use an appliance which is leaking, damaged or does not operate properly. If so, remove to a well ventilated, flame free location.

GENERAL SAFETY ADVICE

Allens will have prepared, checked and delivered this appliance to you in accordance with the Code of Practice entitled "Safe Use of LPG: Portable and Transportable Equipment in the Hire Industry" (LPG Code) launched in October 2013 by the Event Hire Association (EHA).

PLEASE READ THESE INSTRUCTIONS CAREFULLY. THERE IS A RISK OF INJURY IF YOU DO NOT FOLLOW THE INSTRUCTIONS IN THIS GUIDE.

These instructions are provided so you can familiarise yourself with proper and safe operation of this appliance but are not a substitute for being conversant with duties as hirer under the LPG Code.

The safe use of hired gas equipment is the sole responsibility of the hirer once the items are collected or arrive on site. Allens staff are not allowed to install equipment on site and you are not permitted to make any alterations to the appliance or its connectors in any way.



If in any doubt please ask an Allens advisor for advice on 020 8574 9600 or a gas safe engineer conversant with the LPG Code.

Never use the equipment in a poorly ventilated space. Keep all children, animals and bystanders away from the work area. Ensure the floor of the work area is free from trip hazards and non-slip.

Keep a bucket of water nearby to treat burns. Use a CO₂ extinguisher in case of fire. Wear suitable clothing, such as an apron, overall and hat. Use kitchen/BBQ gloves to handle utensils. Tie back long hair.

Allow the appliance to cool fully before touching or cleaning.

1. Turn spill pan so pan supports are right side up.
2. When changing the cartridge, lift open the cartridge housing, using the finger hole.
3. Check the gas seals are in position and in good condition. Insert the gas cartridge carefully aligning the locator tab. Push the gas cartridge locking lever down. Close cover.

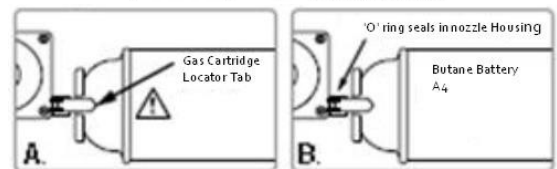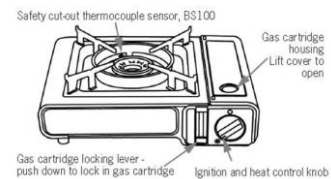

Lighting Instructions

1. Ignite burner by turning the heat control knob anti-clockwise to the spark position indicated by the star. Continue to rotate and action until burner ignites.
2. Maintain the pressure and position of dial for 5-10 seconds. Adjust knob for temperature.
3. After use, extinguish flame by rotating control knob clockwise to the upright/off position and disengage gas cartridge by sliding the locking lever up to the top of the slide.